

#### **Touch Art Remote Switch**

### Hybrid Combination 3+2+1 Zone

# (T13H 523)

### **Technical Manual**



### **Product Overview:**

Toyama Touch Art switches are intelligent control devices that provides convenient and comfort to the user. Usage of SMD components not only ensures reliability but also makes the product highly compact for its functionality and features. The use of SMPS (Switch Mode Power supply) makes the Touch Art switches operational across countries from North America having 127V supply to European/Asian countries having230V supply without any field setting. The switch will withstand a voltage of 440V for 3 minutes. The various functions can be performed from the wall unit or hand held IR remote.


# **Technical Specification:**

٠	Power Source	: 90-270V/AC
•	Power Frequency	: 50-60Hz
٠	Number of Switching Zones	: 3
•	Load per switching zone	: GLS bulbs 1000W or Halogen lamps 200W
		LED fitting/Strip - 12V/3A to 5A driver – one number only
		LED fitting /Strip - 12V/1A to 2A driver - two numbers only
٠	Number of dimming zones	: 2
٠	Load per dimming zone	: GLS bulbs 200W or Halogen lamps 100W or One Fan
•	Number Curtain Zone	: 1 (Open, Close & Stop)
٠	Remote Operating range	: 25 Feet
•	Operating Temperature	: -10 to +55 °C
• Standby power Consumption : <10mW		
TOYAMA CONTROLS & SYSTEM PVT LTD		


36A, KIADB Industrial Estate, Hoskote, Bangalore – 562114 Ph: +91 90914 22331 | Fax: +91 80 27971749 sales@toyamaindia.com | www.toyamaindia.com



#### Wiring Diagram:

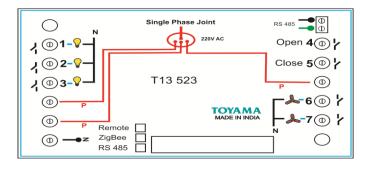

#### **Dimensions:**

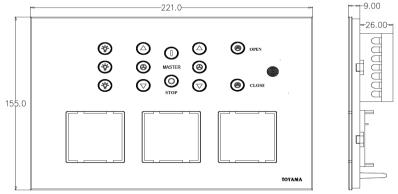

#### **Note: Suitable For**

- Mounting on 12 module metal box (135mmX210mmX50mm)
- Use 1.5 Sq.mm flexible wires for Phase, Neutral & Load connections.

#### Safety Warnings:

- If the input voltage increases to 440V the device will burn.
- Each on/off circuit is rated to 5A resistive load only. If the load is greater than the specification the device will be damaged and will no longer functions.
- If it is LED or CFL fittings connect one or two only per circuit. Anything more may weld the switch contacts and leave the loads permanently ON
- Each dimmer circuit is for 200Watts resistive load or below 120 Watt fan only.
- Do not connect LED or CFL fixtures to Dimming circuits. The device will be damaged.
- If a direct short is created on the output /load, the device will be damaged and will no longer functions.

# **Standard Warranty:**

• Toyama offers a standard 12 months limited warranty on all the Touch Art switches.

#### **TOYAMA CONTROLS & SYSTEM PVT LTD**

36A, KIADB Industrial Estate, Hoskote, Bangalore – 562114 Ph: +91 90914 22331 | Fax: +91 80 27971749 sales@toyamaindia.com | www.toyamaindia.com